





ProSpot 250 LX



Body

- self-extinguish and fire-retardant class V0 ABS material and aluminium light alloy and steel internal components
- GY 9,5 lamp base
- sturdy lateral handles for easy transport
- easy access to all internal parts
- silent convection ventilation
- IP20 protection rating
- meets standards CE

Lamp

- 250W MSD/2 Philips

Optics

- condensor optic and borosilicate, aluminium coated reflector
- high definition achromatic coating focusing lens
- external lamp adjustment in the optical system

Movement

- articulated movement of the projector body: pan 530° tilt 284°
- 16 bit light beam positioning
- immediate reaction to the DMX input data, low inversion inertia
- able to synchronise movement and blackout effect

Gobos

- 6 high precision, interchangeable gobos, variable speed rotating and contra-rotating + open
- wide range of metal, glass and multicolour custom gobos
- proportional position in respect to the optical axes
- gobo "shake" effect adjustable speed
- "slide" effect: gobo changes can be synchronised with the blackout shutter

Dimmer

- built-in mechanical electronically controlled dimmer for complete adjustment of light output from 0 to 100%

Prismi

- 1 rotating variable speed prism for image multiplying that can be used in combination with other

Strobe/Chaser/Black-out

- strobing effect with adjustable flashing speed, synchronised or random
- fading pulse effect
- black-out
- programmable chaser effect with adjustable speed

Colour

- 11 colour plus white
- proportional position in respect to the optical axes
- "slide" effect: colour changes can be synchronised with the blackout shutter
- rainbow effect

Focusing

- motorised focusing lens

Beam angle

- standard: 15°
- optional - with coemar code OB 06: 12°
- optional - with coemar code OB 07: 18°

Hardware devices


- DMX signal reception indicator and characteristic feature display
- control by DMX 512 standard signal via 3 pin XLR
- mains switch
- micro-step driven stepper motors
- 4 menu/function buttons for selecting the operation mode
- led display
- over temperature protection
- ultra-flexible torsion cables conductors

Software devices

- digital numeric addressing of the projector via digital multifunction display
- on/off display
- indication of the lamp and the fixture working life
- ventilation regulated by an internal timer
- display can be inverted
- electronic motor adjustment
- lamp on/off via DMX signal with ability to disable
- reversal of pan and tilt movement
- repositioning in case of accidental misalignment of the fixture and ability to disable
- built-in features test facility
- lamp on/off ability without pan/tilt movement
- software version indication
- unit is set for remote display reading

ds1
DISPLAY REPLICATOR

12°	5658	1414	629	354	226 lux (optional cod. OB 07)
15°	4352	1088	484	272	174 lux (standard)
18°	2688	672	299	168	108 lux (optional cod. OB 06)

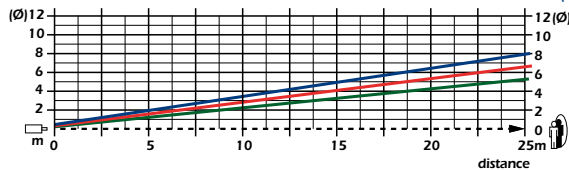

Lamp: 250W MSD/2 Philips