


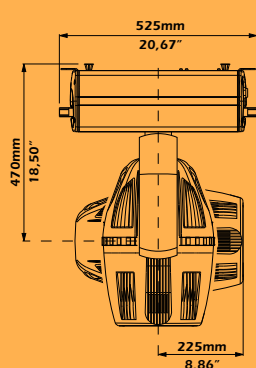


ProWash

575 LX



Body

self-extinguish and fire-retardant class V0 ABS material and aluminium light alloy and steel internal components

- GX 9,5 lamp base
- sturdy lateral handles for easy transport
- easy access to all internal parts
- easy access to the lamp holder
- silent convection ventilation
- self regulation of fans speed
- IP20 protection rating
- meets standards CEE

Lamps available

- 575 MSD Philips
- 575 MSR/2 Philips

Optics

"cold type" heat dissipating parabolic reflector with quartzed dichroic finish (infrared)

- zoom composed by plano-convex lens anti-reflection coated and fresnel lens Ø 185 mm
- external lamp adjustment in the optical system

Movement

articulated movement of the projector body: pan 385° tilt 260°

- 16 bit light beam positioning
- able to synchronise movement and blackout effect

Dimmer

built-in mechanical electronically controlled dimmer for complete adjustment of light output from 0 to 100%

Strobe/Chaser/Black-out

strobing effect with adjustable flashing speed, synchronised or random

- fade pulse effect
- black-out
- programmable chaser effect with adjustable speed

Colour

infinite colour output via CMY colour

- 6 solid colours + white on colour

- rainbow effect
- multi-color effect
- CTO filter
- CTB filter
- 'slide' effect: colour changes can be synchronised with the blackout shutter

Beam shaping device

rotating filter (beam shaping) for 180° shaping (par effect)

Progressive zoom

from 9,5° to 23° (half peak angle) from 19° to 34° (1/10 peak angle) maximum angle: 44°


Hardware devices

- DMX signal reception indicator and characteristic feature display
- control by DMX 512 standard signal via 3 pin XLR
- mains switch
- micro-step driven stepper motors
- 4 menu/function buttons for selecting the operation mode
- led display
- over temperature protection
- ultra-flexible torsion cables

Software devices

- digital numeric addressing of the projector via digital multifunction display
- on/off display
- indication of the lamp and the fixture working life
- display can be inverted
- electronic motor adjustment
- lamp on/off via DMX signal with ability to disable
- reversal of pan and tilt movement
- repositioning in case of accidental misalignment of the fixture and ability to disable
- lamp on/off ability without pan/tilt movement
- built-in features test facility
- lamp on/off ability without pan/tilt movement
- individual control of motors function even without DMX signal; position of motors can be recorded during switching on of the unit
- built-in features test facility
- software version indication
- unit is set for remote display reading

ds1
DISPLAY REPLICATOR

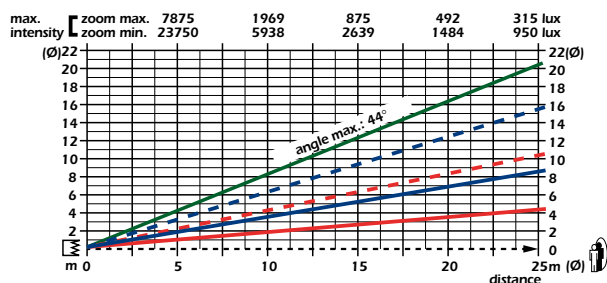

progressive zoom: — min. 9,5°/max. 23° (1/2 peak angle)
— min. 19°/max. 34° (1/10 peak angle)

Lamp: 575W MSR/2