


between the engine sprocket and rear wheel sprocket.

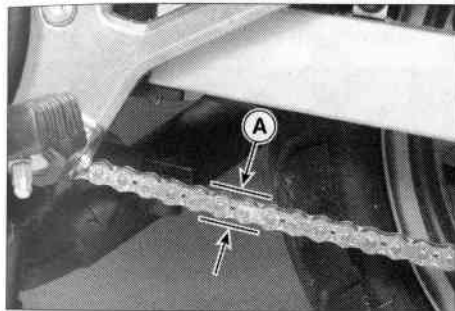

A. 35 ~ 45 mm (1.4 ~ 1.8 in.)

- If the drive chain is too tight or too loose, adjust it so that the chain slack will be within the standard value.

Drive Chain Slack

| | |
|----------|-------------------------------|
| Standard | 35 ~ 40 mm (1.4 ~ 1.6 in.) |
|----------|-------------------------------|

Chain Slack Adjustment

- Remove the safety clip from the rear torque link nut.
- Loosen the rear torque link nut.

CAUTION

Do not forget to loosen the torque link nut.