


- Apply a thin film of oil on the packing and tighten the cartridge to the specified torque.

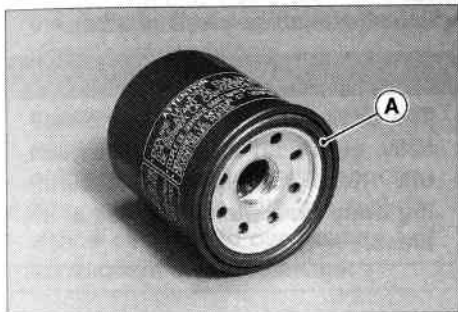

A. Packing

- Install the drain plug with its gasket. Tighten it to the specified torque.

NOTE

- *Replace the damaged gasket with a new one.*

- Fill the engine up to the upper level line with a good quality motor oil specified in the table.
- Start the engine.
- Check the oil level and for oil leakage.

Tightening Torque

Engine Drain Plug:

29 N·m (3.0 kg·m, 22 ft·lb)

Cartridge:

17 N·m

(1.75 kg·m, 12.5 ft·lb)

Recommended Engine Oil

Type:

API SE, SF or SG

API SH or SJ with JASO MA

SAE 10W-40