


- Disconnect the leads from the battery, first from the (-) terminal and then the (+) terminal.

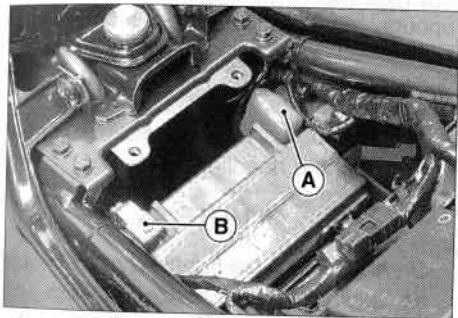

A. (+) Terminal

B. (-) Terminal

- Take the battery out of the case.
- Clean the battery using a solution of baking soda and water. Be sure that the lead connections are clean.

Battery Installation

- Put the battery in the battery case.

- Connect the capped lead to the (+) terminal, and then connect the black lead to the (-) terminal.
- Put a light coat of grease on the terminals to prevent corrosion.
- Cover the (+) terminal with its protective cap.
- Reinstall the parts removed.