


Position	1	2	3	4	5
Spring Action	→ Stronger				

The standard setting position for an average-build rider of 68 kg (150 lb) with no passenger and no accessories is No.1.

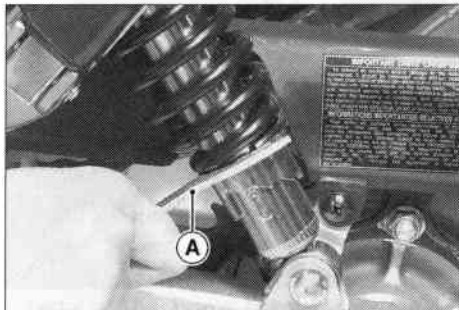

A. Wrench

⚠ WARNING

If both spring adjusting sleeves are not adjusted equally, handling may be impaired and a hazardous condition may result.

NOTE

- *Be sure to turn back the adjuster counter-clockwise from position 5 when softening the spring action.*