


- Turn out both upper nuts and turn in both lower nuts at the lower ends of the throttle cables as far as they will go so as to give the throttle grip plenty of play.

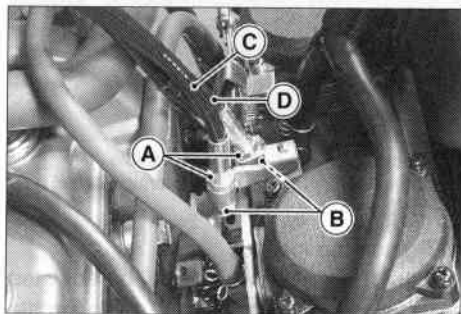

A. Upper Nuts
B. Lower Nuts

C. Decelerator Cable
D. Accelerator Cable

- With the throttle grip completely closed, turn out the lower nut and turn in the upper nut of the decelerator cable until the inner cable just becomes tight.

- Turn out the lower nut and turn in the upper nut of the accelerator cable until the correct throttle grip free play is obtained.
- Turn the handlebar from side to side while idling the engine.
- If idle speed varies, the cable may be poorly routed or damaged.

⚠ WARNING

Operation with an improperly adjusted, incorrectly routed, or damaged cables could result in an unsafe riding condition.