


### *Oil and/or Oil Filter Change*

- Warm up the engine thoroughly, and then stop it.
- Place an oil pan beneath the engine.
- Remove the engine oil drain plug.

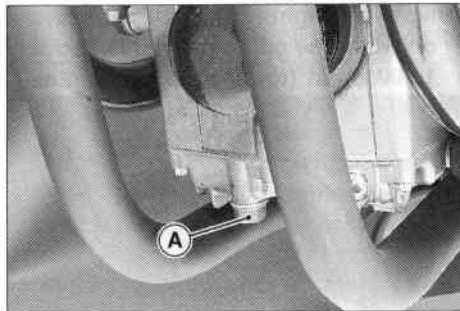


**A. Drain Plug**

- Let the oil completely drain with the motorcycle perpendicular to the ground.

### **⚠ WARNING**

**Motor oil is a toxic substance. Dispose of used oil properly. Contact your local authorities for approved disposal methods or possible recycling.**

- If the oil filter is to be replaced, remove the oil filter cartridge and replace it with a new one.

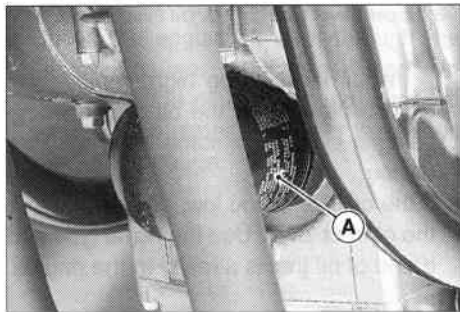

**A. Cartridge**