



nexe
KERAMIKA

Kolekcija 2011
Collection 2011

Datum izdavanja kataloga: APRIL, 2011
Grafičko oblikovanje: Grape
Štampa: Štamparija Stojkov
Tiraž: 2000

Kompanija Polet-Keramika kao deo poslovnog sistema Nexe Grupe doprinosi stvaranju savremenog životnog stila, koji motiviše inovativnost u unutrašnjem dekorisanju prostora. Nexe keramika kao zaokruženi proizvodno prodajni program Polet-Keramike, obuhvata ponudu podnih i zidnih keramičkih pločica upotpunjenih bordurama, različitih dimenzija i dekora izrađenih po najsavremenijoj italijanskoj tehnologiji.

Posebno pažnjom usmereni smo na kvalitet i odabir širokog spektra mogućnosti koju pružaju materijali za proizvodnju keramičkih pločica, a koji predstavljaju optimalnu kombinaciju domaćih sirovina i sirovina od najjemenitijih italijanskih i španskih proizvođača. Kroz kompatibilnost boja i dekora, odabranih od italijanskih i španskih dizajnerskih kuća sa kojima kontinualno sarađujemo, Nexe keramika odgovara svim savremenim izazovima – spoju klasičnih stilova i modernih trendova. Programom pločica, koji je ujedno i klasičan i savremen, obezbeđujemo kupcima mogućnost izbora i ispoljavanje sopstvene kreativnosti.

Polet- Keramika kroz svoju strategiju neprekidno radi na dostizanju svog cilja
- podizanju stepena zadovoljenja zahteva i potreba svojih kupaca.

Polet Keramika company, a part of Nexe Group business system, contributes to forming a modern life style motivating innovation in interior space decoration. Nexe ceramics, as a completed production-sales program of Polet Keramika, includes an offer of floor and wall ceramic tiles with corresponding lists, different dimensions and decors made according the most up-to-date Italian technology.

Our special care is directed to quality and wide selection of possibilities that materials for ceramic tiles offer being a combination of raw materials from both domestic and famous Italian and Spanish producers.

Through the colour and decor compatibility, chosen by Italian and Spanish design agencies we constantly collaborate, Nexe ceramics fits all the contemporary challenges – mixture of classical and modern trends. Having this range of tiles we provide our clients with a possibility of choice and their creativity demonstration.

Polet Keramika's strategy is a continuous work towards its goal attainment:
raising a level of the clients' demand and need accomplishments.







Petali, Linea & Spectra



trend line Petali
KERAMICKE PLOČICE




Zidne pločice / Wall tiles

Petali 10 (20/40)



Petali CC (20/40)



Listele

Petali 1 (40/5.4)




Petali 2 (40/5.4)



Podne pločice / Floor tiles

Petali RP CC (33/33)





trend line Linea

KERAMICKE PLOČICE



Zidne pločice / Wall tiles - Inserti / Inserts

Linea 112 (20/40)



Linea 122 (20/40)



Linea 61 (20/40)



Geometrics S 122 (20/40) **Geometrics S 61** (20/40)



Listele

Geometrics B 122 (40/4.6)



Geometrics B 61 (40/4.6)



Rosa 21 (40/5)



Fiore 02 (40/6.3)



Fiore 06 (40/6.3)



Grafite (40/6.3)



Podne pločice / Floor tiles

Linea RP 112 (33/33)



Linea RP 166 (33/33)





trend line Spectra
KERAMICKE PLOČICE



Zidne pločice / Wall tiles

Spectra 10 (20/40)



Spectra 133 (20/40)



Spectra 33 (20/40)



Spectra 44 (20/40)



Spectra 155 (20/40)



Spectra 55 (20/40)



Optic 33 (20/40)



Optic 41 (20/40)



Optic 44 (20/40)



Optic 55 (20/40)



Listele

Optic 111 (40/5)



Optic 131 (40/5)



Optic 141 (40/5)



Optic 151 (40/5)



Linea 157 (40/4.8)



Podne pločice / Floor tiles

Green JP 30 (33/33)



Blue JP 40 (33/33)



Orange JP 50 (33/33)







Mosaico, Goteborg & Maja



Biscotti Maja
KERAMICHE FLOCCIE



Zidne pločice / Wall tiles

Mosaico 105 (20/20)



Mosaico 102 (20/20)



Bela 101 (20/20)



Zidne pločice / Wall tiles

Maja J 50 (20/20)



Maja J 20 (20/20)



Bela J 10 (20/20)





Biscotti Göteborg
KERAMIK PLOČE



Zidne pločice / Wall tiles

Göteborg 109 (20/20)



Göteborg 107 (20/20)



Göteborg 106 (20/20)



Insert / Inserts

Arcobaleno S 109 (20/20)



Listela

Arcobaleno B 109 (20/4.6)







Tartan, Marrakesh, Ring, Spring, Valley, Violaus,
Romantic, Alabastrino, Marta, Olimp, Tera, Viena



classic Tartan
KERAMICKE
PLOČICE



Zidne pločice / Wall tiles

Tartan 127 (25/33)



Tartan 188 (25/33)



Tartan 199 (25/33)



Podne pločice / Floor tiles

Tartan RP 157 (33/33)




Tartan RP 188 (33/33)



Tartan RP 199 (33/33)



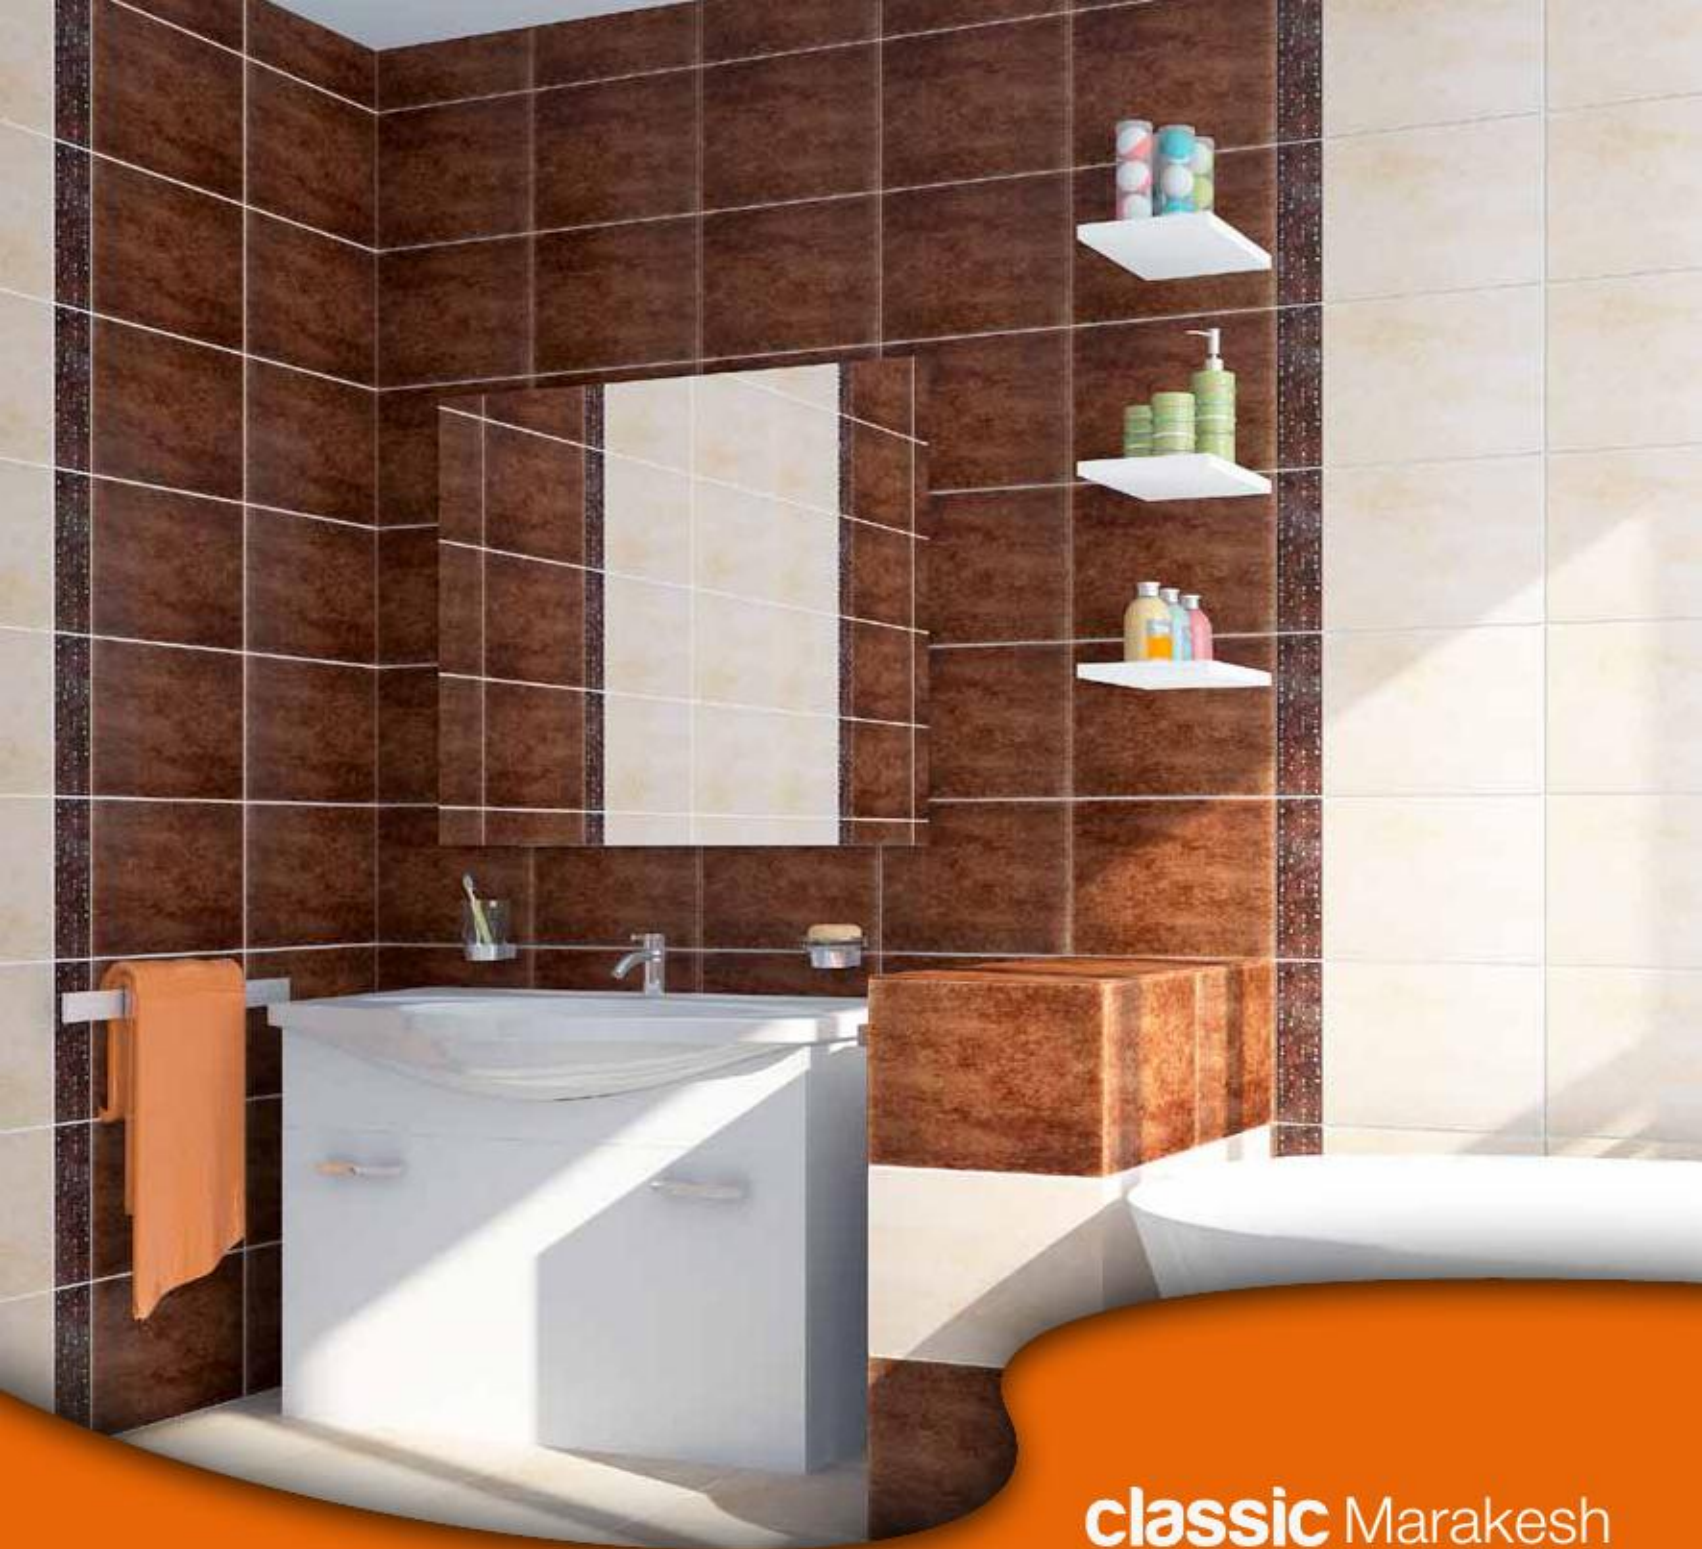

classic Marakesh
KERAMICKE
PLOCICE



Zidne pločice / Wall tiles

Marakesh 117 (25/33)



Marakesh 144 (25/33)



Marakesh 157 (25/33)



Marakesh 177 (25/33)



Podne pločice / Floor tiles

Marakesh RP 117 (33/33)



Marakesh RP 144 (33/33)



Marakesh RP 157 (33/33)



Marakesh RP 177 (33/33)





classic Ring
KERAMICKÉ
PŁOČICE



Zidne pločice / Wall tiles

Ring 10 (25/33)



Ring 50 (25/33)



Ring 70 (25/33)



Ring 80 (25/33)



Podne pločice / Floor tiles

Ring RP 70 (33/33)



Ring RP 80 (33/33)





classic Spring
KERAMICKÉ
PŁOČICE



Zidne pločice / Wall tiles

Spring 113 (25/33)



Spring 199 (25/33)



Listele

Provansa 133 (25/5.5)



Podne pločice / Floor tiles

Spring RP 119 (33/33)



Spring RP 133 (33/33)





classic Valley
KERAMICKÉ
PŁOČICE



Zidne pločice / Wall tiles

Valley 119 (25/33)



Valley 177 (25/33)



Listele

Flavia 50 (25/7.2)



Flavia 70 (25/7.2)



Podne pločice / Floor tiles

Valley RP 119 (33/33)



Valley RP 177 (33/33)





classic Violaus
KERAMICKÉ
PŁOČICE



Zidne pločice / Wall tiles

Violaus 278 (25/33)



Violaus 077 (25/33)



Violaus 225 (25/33)



Violaus 257 (25/33)



Violaus 233 (25/33)



Violaus 019 (25/33)



Listele

Apis 225 (25/5.4)



Apis 233 (25/5.4)



Apis 257 (25/5.4)



Apis 278 (25/5.4)



Podne pločice / Floor tiles

Violaus RP 278 (33/33)



Violaus RP 225 (33/33)



Violaus RP 257 (33/33)



Violaus RP 233 (33/33)





classic Romantic
KERAMICKE
PLOČICE



Zidne pločice / Wall tiles

Romantic 216 (25/33)
 Romantic 266 (25/33)
 Romantic 227 (25/33)
 Romantic 278 (25/33)
 Garden S 20 (25/33)
 Garden S 60 (25/33)



Listele

Garden B 20 (25/7)



Garden B 60 (25/7)



Romantic 016 (25/5.5)



Romantic 017 (25/5.5)



Podne pločice / Floor tiles

Romantic RP 166 (33/33)



Romantic RP 122 (33/33)



Romantic RP 278 (33/33)





classic Alabastrino
KERAMIČKE
PLOČICE



Zidne pločice / Wall tiles

Alabastrino 107 (25/33)



Listela


Iva 17 (25/5)



Podne pločice / Floor tiles

Alabastrino RP 117 (33/33)



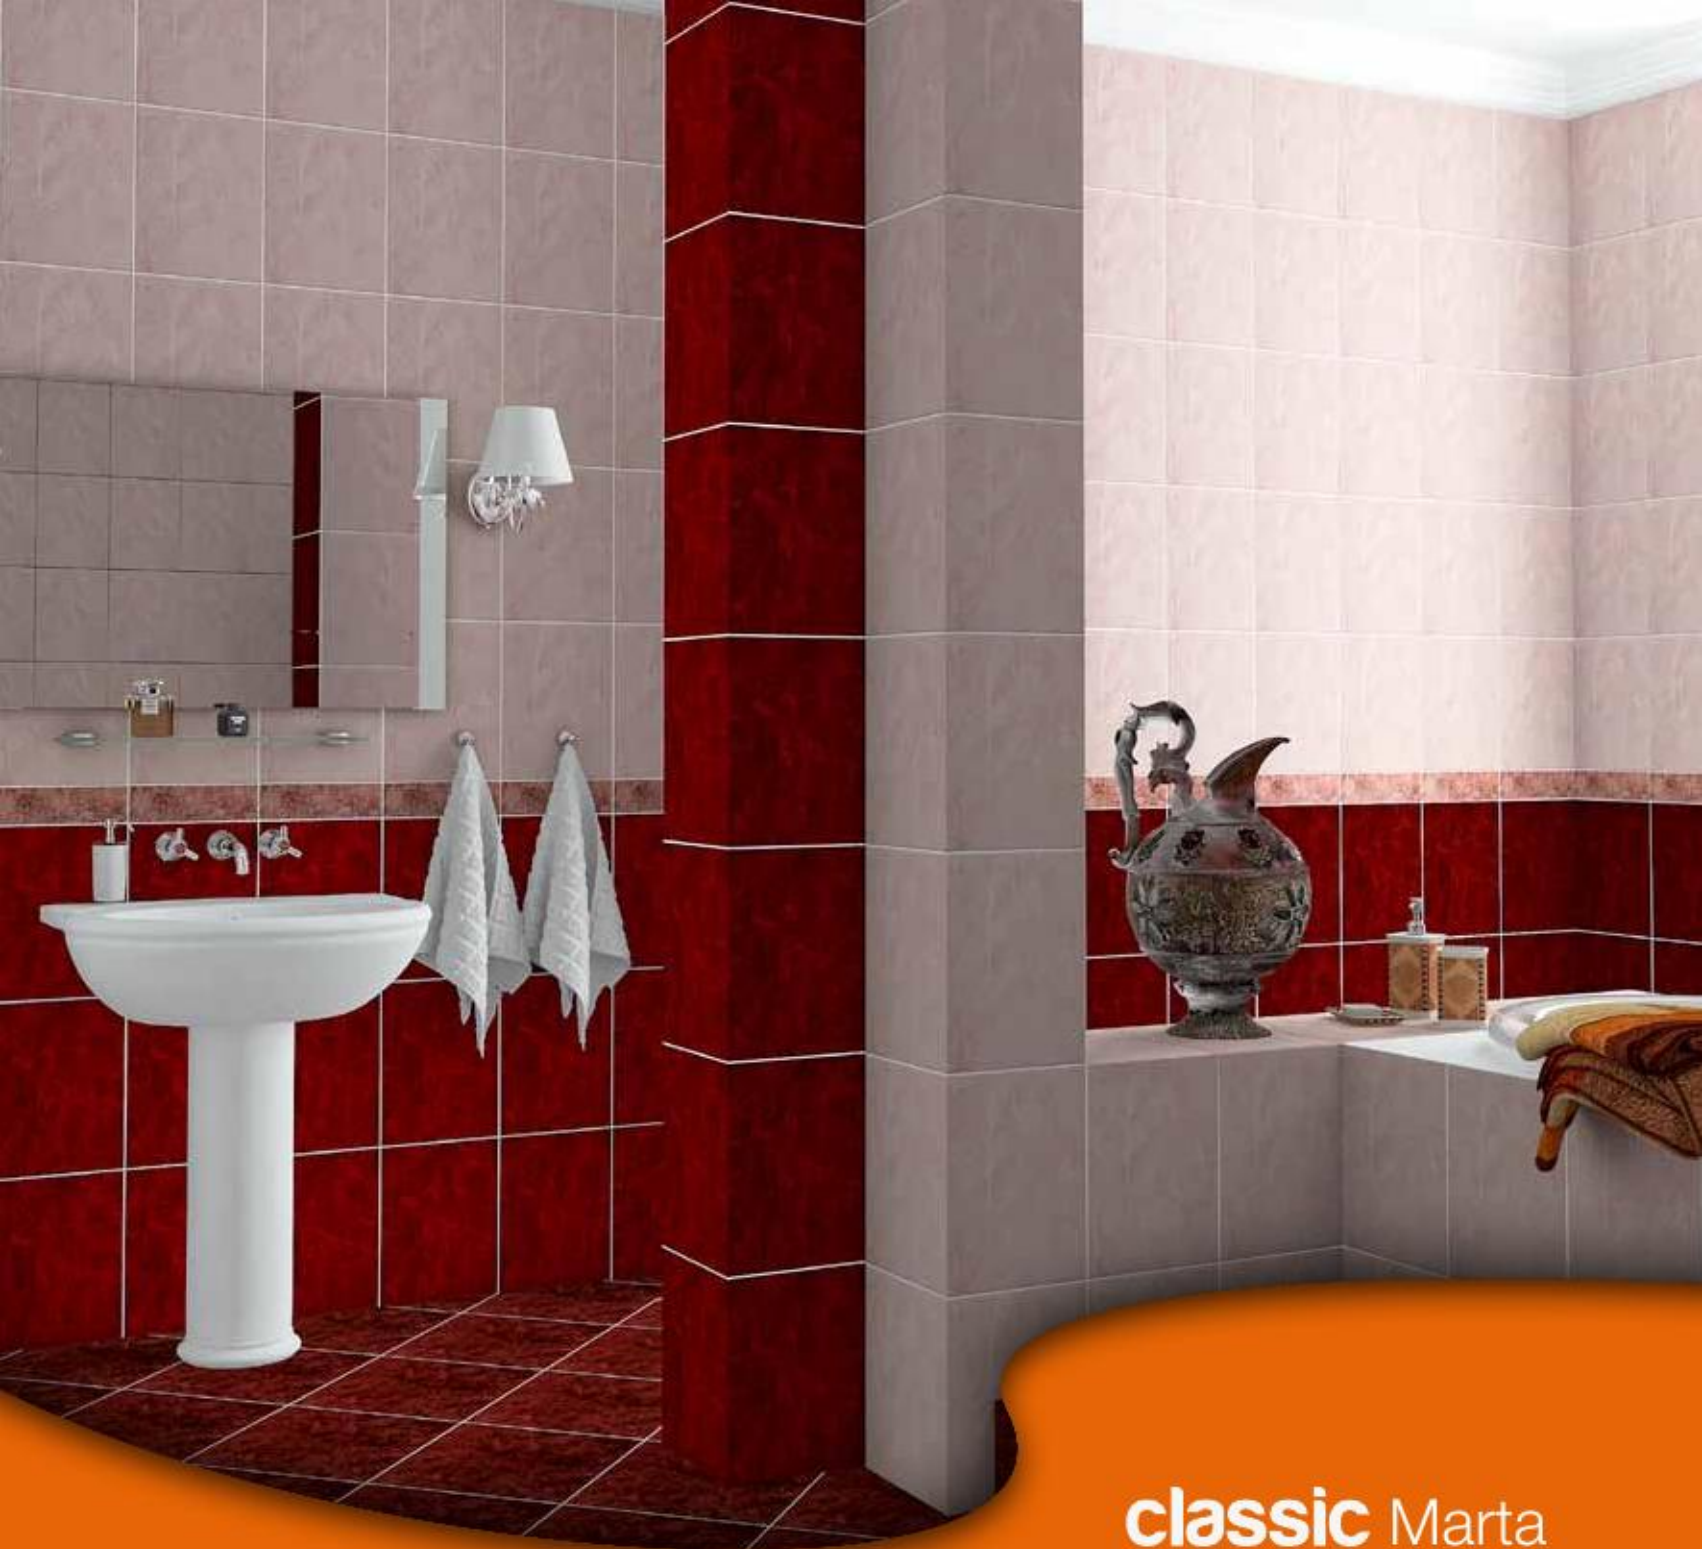

classic Marta
KERAMICKE
PLOČICE



Zidne pločice / Wall tiles

Marta 013 (25/33)



Marta 113 (25/33)



Marta 014 (25/33)



Marta 114 (25/33)



Marta 017 (25/33)



Marta 117 (25/33)



Marta C (25/33)



Marta SR (25/33)



Listele

Narcis 131 (25/6.5)



Narcis 171 (25/6.5)



Hera 01 (25/6.5)



Hera 04 (25/6.5)



Flavia C (25/7.2)



Podne pločice / Floor tiles

Marta RP 113 (33/33)



Marta RP 114 (33/33)



Marta RP 117 (33/33)



Marta RP C (33/33)





classic Olimp
KERAMICKE
PLOČICE



Zidne pločice / Wall tiles

Olimp 013 (25/33)



Olimp 113 (25/33)



Olimp 014 (25/33)



Olimp 114 (25/33)



Olimp 016 (25/33)



Olimp 116 (25/33)



Olimp 019 (25/33)



Olimp 118 (25/33)



Listele

Neptun 121 (25/8)



Neptun 131 (25/8)



Neptun 141 (25/8)



Neptun 161 (25/8)



Neptun 181 (25/8)



Olimp Green (25/5.5)



Olimp Blue (25/5.5)



Olimp Orange (25/5.5)





classic Olimp
KERAMICKE
PLOČICE



Podne pločice / Floor tiles

Olimp RP 103 (33/33)



Olimp RP 114 (33/33)



Olimp RP 106 (33/33)



Olimp RP 108 (33/33)





classic Tera
KERAMICKE
PLOČICE



Zidne pločice / Wall tiles

Tera 107 (25/33)



Tera 117 (25/33)



Listele

Hera 3 (25/6.5)



Narcis 171 (25/6.5)



Podne pločice / Floor tiles

Tera RP 117 (33/33)





classic Viena
KERAMICKÉ
PŁOČICE



Zidne pločice / Wall tiles

Viena 017 (25/33)



Viena 117 (25/33)



Listele

Hera 3 (25/6.5)




Narcis 171 (25/6.5)



Podne pločice / Floor tiles

Viena RP 117 (33/33)



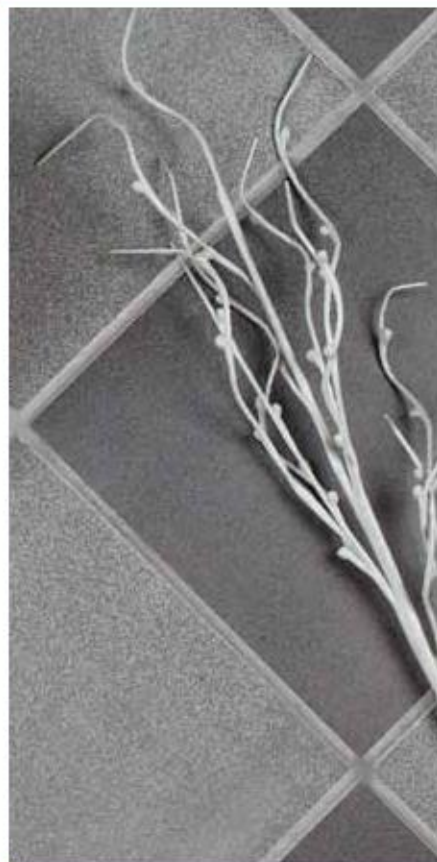



Pegy, Legno, Cotto, Ardesia, Argentina



sotto Argentina

Podne pločice



Podne pločice

Pegy RP 117 (33/33)



Pegy RP 119 (33/33)



Pegy RP 177 (33/33)



Pegy RP 199 (33/33)



Pegy RP 127 (33/33)



Podne pločice / Floor tiles

Legno RP 177 (33/33)



Cotto RP 175 (33/33)



Ardesia RP 127 (33/33)



Argentina RP 198 (33/33)



Argentina RP 127 (33/33)



**SUVO PRESOVANE ZIDNE KERAMIČKE PLOČICE
SA UPIJANJEM VODE E>10%
GRUPA BIII, SRPS EN 14411, PRILOG L**

ZAHTEVI MERE I KVALITET POVRŠINE	ZAHTEVANE VREDNOSTI	METODA ISPITIVANJA
Dužina (l) i širina (w) Proizvođač određuje radnu veličinu prema sledećem: Za nemodularne pločice tako da razlika između radne veličine i nazivne veličine ne bude veća od +/- 2mm		SRPS ISO 10545-2
Odstupanje prosečne veličine svake pločice (2 ili 4 strane) od radne veličine (W), u %	+/- 0,5%	
Odstupanje prosečne veličine svake pločice (2 ili 4 strane) od prosečne veličine 10 uzoraka (20 ili 40 strana), u %	+/- 0,3%	
Debljina (određuje je proizvođač)		SRPS ISO 10545-2
Odstupanje prosečne debljine svake pločice od radne debljine, u %	+/- 10%	
Ravnost stranica (vidne stranice)		SRPS ISO 10545-2
Najveće odstupanje od ravnosti u odnosu na odgovarajuće radne veličine, u %	+/- 0,3%	
Odstupanje od pravog ugla		SRPS ISO 10545-2
Najveće odstupanje od pravog ugla u odnosu na odgovarajuće radne veličine, u %	+/- 0,5%	
Ravnost površine		SRPS ISO 10545-2
Najveće odstupanje od ravnosti u %		
a) centralna zakrivljenost, u odnosu na dijagonalu, izračunatu iz radnih veličina;	+ 0,5/- 0,3%	
b) ivična zakrivljenost, u odnosu na odgovarajuće radne veličine;	+ 0,5/- 0,3%	
c) izvitoperenost, u odnosu na dijagonalu, izračunatu iz radnih veličina.	+/- 0,5%	
Kvalitet površine		SRPS ISO 10545-2
Najmanje 95% pločica mora biti bez vidljivih oštećenja koja bi pogoršala izgled većeg dela površine pločica		
FIZIČKA SVOJSTVA		
Upijanje vode, u masenim %	Prosečno > 10%. Kada pros. vredn. premaši 20%, mora biti naznačeno. Pojed. najm. vredn. 9%	SRPS ISO 10545-3
Čvrstoća pri lomu, u N Debljina ≥ 7,5 mm Debljina < 7,5 mm	Ne manje od 600 Ne manje od 200	SRPS ISO 10545-4
Modul loma pri savijanju, u N/mm ² ne primenjuje se kod pločica sa čvrst. pri lomu ≥3000 N Debljina ≤ 7.5 mm Debljina > 7.5 mm	Najmanje 15 Najmanje 12	SRPS ISO 10545-4
Otpornost prema vlasavosti: glazirane pločice	Zahteva se	SRPS ISO 10545-11
HEMIJSKA SVOJSTVA		
Otpornost prema stvaranju mrlja	Najmanje klasa 3	SRPS ISO 10545-14
Otpornost prema hemikalijama		SRPS ISO 10545-13
Otpornost prema malim koncentracijama kiselina i baza	Postoji met. ispit.	
Otpornost prema hemikalijama u domaćinstvu isredstvima za prečišćavanje vode u plivačkim bazenima	Najmanje GB	

DRY-PRESSED WALL CERAMIC TILES
E>10%, GROUP BIII
SRPS EN 14411, ANNEX L

DIMENSIONS AND SURFACE QUALITY	REQUIREMENTS	TESTING METHOD
Length (l) and width (w) The manufacturer shall choose the work size as follows: For non-modular tiles so that the difference between the work size and the nominal size is not more than +/- 2mm.		SRPS ISO 10545-2
The deviation, in percent, of the average size for each tile (2 or 4 sides) from the work size (W)	+/- 0,5%	
The deviation, in percent, of the average size for each tile(2 or 4 sides) from the average size 10 test specimens (20 or 40 sides)	+/- 0,3%	
Thickness (shall be specified by the manufacturer)		SRPS ISO 10545-2
The deviation, in percent, of the average thickness of each tile from the work size thickness.	+/- 10%	
Straightness of sides (facial sides)		SRPS ISO 10545-2
The maximum deviation from straightness, in percent, related to the corresponding work sizes	+/- 0,3%	
Rectangularity		SRPS ISO 10545-2
The maximum deviation from rectangularity, in percent, related to the corresponding work sizes	+/- 0,5%	
Surface flatness		SRPS ISO 10545-2
The maximum deviation from flatness, in percent:		
a) centre curvature, related to diagonal calculated from the work sizes;	+ 0,5/- 0,3%	
b) edge curvature, related to the corresponding work sizes;	+ 0,5/- 0,3%	
c) warpage, related to diagonal calculated from the work sizes.	+/- 0,5%	
Surface quality		SRPS ISO 10545-2
A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles		
PHYSICAL PROPERTIES		
Water absorption, percent by mass	Average > 10%. When the av. exceeds 20%, this shall be indicated. Ind. min. value 9%.	SRPS ISO 10545-3
Breaking strength, in N Thickness ≥ 7,5 mm Thickness < 7,5 mm	No less than 600 No less than 200	SRPS ISO 10545-4
Modulus of rupture, in N/mm² not applicable to tiles with breaking strength ≥3000 N Thickness ≤ 7,5 mm Thickness > 7,5 mm	Minimum 15 Minimum 12	SRPS ISO 10545-4
Crazing resistance: glazed tiles	Required	SRPS ISO 10545-11
CHEMICAL PROPERTIES		
Resistance to staining	Minimum Class 3	SRPS ISO 10545-14
Resistance to chemicals		SRPS ISO 10545-13
Resistance to low concentrations of acids and alkalis	Test method available	
Resistance to household chemicals and swimming pool salts: glazed tiles.	Minimum GB	

SUVO PRESOVANE PODNE KERAMIČKE PLOČICE
SA MALIM UPIJANJEM VODE $0.5\% < E \leq 3\%$
GRUPA BIb, SRPS EN 14411, PRILOG H

ZAHTEVI MERE I KVALITET POVRŠINE	ZAHTEVANE VREDNOSTI		METODA ISPITIVANJA
	190<S≤410	S>410	
Dužina (l) i širina (w) Proizvođač određuje radnu veličinu prema sledećem: Za nemodularne pločice tako da razlika između radne veličine i nazivne veličine ne bude veća od +/- 2% (najviše +/-5mm)			SRPS ISO 10545-2
Odstupanje prosečne veličine svake pločice (2 ili 4 strane) od radne veličine (W), u %	+/- 0,75%	+/- 0,6%	
Odstupanje prosečne veličine svake pločice (2 ili 4 strane) od prosečne veličine 10 uzoraka (20 ili 40 strana), u %	+/- 0,5%	+/- 0,5%	
Debljina (određuje je proizvođač)			SRPS ISO 10545-2
Odstupanje prosečne debljine svake pločice od radne debljine, u [%]	+/- 5%	+/- 5%	
Ravnost stranica (vidne stranice)			SRPS ISO 10545-2
Najveće odstupanje od ravnosti u odnosu na odgovarajuće radne veličine u %	+/- 0,5%	+/- 0,5%	
Odstupanje od pravog ugla			SRPS ISO 10545-2
Najveće odstupanje od pravog ugla u odnosu na odgovarajuće radne veličine, u %	+/- 0,6%	+/- 0,6%	
Ravnost površine			SRPS ISO 10545-2
Najveće odstupanje od ravnosti u %	+/- 0,5%	+/- 0,5%	
a) centralna zakrivljenost, u odnosu na dijagonalu izračunatu iz radnih veličina	+/- 0,5%	+/- 0,5%	
b) ivična zakrivljenost, u odnosu na odgovarajuće radne veličine	+/- 0,5%	+/- 0,5%	
c) izvitoperenost, u odnosu na dijagonalu, izračunatu iz radnih veličina.	+/- 0,5%	+/- 0,5%	
Kvalitet površine			SRPS ISO 10545-2
Najmanje 95% pločica mora biti bez vidljivih oštećenja koja bi pogoršala izgled većeg dela površine pločica.			
FIZIČKA SVOJSTVA			
Upijanje vode, u masenim %	0,5% < E ≤ 3% pojedinačno najviše 3,3%		SRPS ISO 10545-3
Čvrstoća pri lomu, u N Debljina ≥ 7,5 mm Debljina < 7,5 mm	Ne manje od 1100 Ne manje od 700		SRPS ISO 10545-4
Modul loma pri savijanju, u N/mm ² ne primenjuje se kod pločica sa čvrst. pri lomu ≥3000 N	najmanje 30 pojedinačno najmanje 27		SRPS ISO 10545-4
Otpornost prema habanju b) Otpornost površine glaziranih pločica prema habanju namenjene za korišćenje na podovima	Zabeležena klasa habanja i broj obrtaja		SRPS ISO 10545-7
Otpornost prema mrazu	zahteva se		SRPS ISO 10545-12
Otpornost prema vlasavosti: glazirane pločice	zahteva se		SRPS ISO 10545-11
HEMIJSKA SVOJSTVA - GLAZIRANE PLOČICE			
Otpornost prema stvaranju mrlja	najmanje klasa 3		SRPS ISO 10545-14
Otpornost prema hemikalijama			SRPS ISO 10545-13
Otpornost prema malim koncentracijama kiselina i baza	Proizvođač utvrđuje klasu		
Otpornost prema hemikalijama u domaćinstvu i sredstvima za prečišćavanje vode u plivačkim bazenima	najmanje GB		

DRY-PRESSED FLOOR CERAMIC TILES
WITH LOW WATER ABSORPTION $0,5\% < E \leq 3\%$
GROUP BIb, SRPS EN 14411, ANNEX H

REQUIREMENTS DIMENSIONS AND SURFACE QUALITY	REQUIREMENTS		TESTING METHOD
	190<S≤410	S>410	
Length (l) and width (w) The manufacturer shall choose the work size as follows: For non-modular tiles so that the difference between the work size and the nominal size is not more than +/- 2% (max +/-5mm)			SRPS ISO 10545-2
The deviation, in percent, of the average size for each tile (2 or 4 sides) from the work size (W)	+/- 0,75%	+/- 0,6%	
The deviation, in percent, of the average size for each tile (2 or 4sides) from the average size 10 test specimens (20 or 40 sides)	+/- 0,5%	+/- 0,5%	
Thickness (shall be specified by the manufacturer)			SRPS ISO 10545-2
The deviation, in percent, of the average thickness of each tile from the work size thickness.	+/- 5%	+/- 5%	
Straightness of sides (facial sides)			SRPS ISO 10545-2
The maximum deviation from straightness, in percent, related to the corresponding work sizes	+/- 0,5%	+/- 0,5%	
Rectangularity			SRPS ISO 10545-2
The maximum deviation from rectangularity, in percent, related to the corresponding work sizes	+/- 0,6%	+/- 0,6%	
Surface flatness			SRPS ISO 10545-2
The maximum deviation from flatness, in percent:			
a) centre curvature, related to diagonal calculated from the work sizes	+/- 0,5%	+/- 0,5%	
b) edge curvature, related to the corresponding work sizes	+/- 0,5%	+/- 0,5%	
c) warpage, related to diagonal calculated from the work sizes.	+/- 0,5%	+/- 0,5%	
Surface quality			SRPS ISO 10545-2
A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.			
PHYSICAL PROPERTIES			
Water absorption, percent by mass	0,5% < E ≤ 3% individual maximum 3,3%		SRPS ISO 10545-3
Breaking strength, in N Thickness ≥ 7,5 mm Thickness < 7,5 mm	Not less than 1100 Not less than 700		SRPS ISO 10545-4
Modulus of rupture, in N/mm² not aplicable to tiles with breaking strength ≥3000 N	Minimum 30 individual minimum 27		SRPS ISO 10545-4
Abrasion resistance Resistance to surface abrasion of glazed tiles intended for use on floors.	Report abrasion class and cycles passed		SRPS ISO 10545-7
Crazing resistance: glazed tiles	Required		SRPS ISO 10545-11
Frost resistance	Required		SRPS ISO 10545-12
CHEMICAL PROPERTIES - VARNISHED TILES			
Resistance to staining glazed tiles	Minimum Class 3		SRPS ISO 10545-14
Resistance to chemicals			SRPS ISO 10545-13
Resistance to low concentrations of acids and alkalis, glazed tiles.	Manufacturer to state classification		
Resistance to household chemicals and swimming pool salts: glazed tiles.	Minimum GB		

ZIDNE PRESOVANE KERAMICKE PLOČICE

PRESSED CERAMIC WALL TILES

FORMAT (mm)	250 x 330 x 7,4	200x400x8	FORMAT (mm)
PAKOVANJE U KUTIJE			PACKING IN BOXES
BROJ PLOČICA U KUTIJI (kom)	16	16	TILES IN BOXES (pcs)
TEŽINA KUTIJE (kg)	17,28	18,40	BOX WEIGHT (kg)
m ² U KUTIJI	1,32	1,28	m ² IN BOX
PAKOVANJE NA PALETI			PACKING IN PALETTE
DIMENZIJE PALETE (mm)	1000x1046	1000x1046	PALETTE SIZE (mm)
BROJ KUTIJA U REDU	20	16	BOXES IN ROW
BROJ REDOVA	3	4	ROWS
VISINA PALETE (mm)	780	840	PALETTE HEIGHT (mm)
TEŽINA PALETE (kg)	1018	1177,6	PALETTE WEIGHT (kg)
m ² NA PALETI	79,20	81,92	m ² ON PALETTE

PODNE PRESOVANE KERAMICKE PLOČICE

PRESSED CERAMIC FLOOR TILES

FORMAT (mm)	330 x 330 x 8	FORMAT (mm)
PAKOVANJE U KUTIJE		PACKING IN BOXES
BROJ PLOČICA U KUTIJI (kom)	14	TILES IN BOXES (pcs)
TEŽINA KUTIJE (kg)	27	BOX WEIGHT (kg)
m ² U KUTIJI	1,52	m ² IN BOX
PAKOVANJE NA PALETI		PACKING IN PALETTE
DIMENZIJE PALETE (mm)	1000 x 1046	PALETTE SIZE (mm)
BROJ KUTIJA U REDU	22	BOXES IN ROW
BROJ REDOVA	2	ROWS
UKUPNO KUTIJA NA PALETI	44	TOTAL NUMBER OF BOXES ON PALETTE
VISINA PALETE (mm)	670	PALETTE HEIGHT (mm)
TEŽINA PALETE (kg)	1200	PALETTE WEIGHT (kg)
m ² NA PALETI	66,88	m ² ON PALETTE

PODNE PRESOVANE KERAMICKE PLOČICE

PRESSED CERAMIC FLOOR TILES

FORMAT (mm)	200 x 200 x 7	FORMAT (mm)
PAKOVANJE U KUTIJE		PACKING IN BOXES
BROJ PLOČICA U KUTIJI (kom)	25	TILES IN BOXES (pcs)
TEŽINA KUTIJE (kg)	11,5	BOX WEIGHT (kg)
m ² U KUTIJI	1	m ² IN BOX
PAKOVANJE NA PALETI		PACKING IN PALETTE
DIMENZIJE PALETE (mm)	1020 x 1046	PALETTE SIZE (mm)
BROJ KUTIJA U REDU	25	BOXES IN ROW
BROJ REDOVA	4	ROWS
VISINA PALETE (mm)	925	PALETTE HEIGHT (mm)
TEŽINA PALETE (kg)	1165	PALETTE WEIGHT (kg)
m ² NA PALETI	100	m ² ON PALETTE

